

# Bridge Rectifier

## **DF01M**

100V / 1A

# DATASHEET

from

[www.web-bcs.com](http://www.web-bcs.com)

OEM – General Semiconductor


Source: General Semiconductor Databook 1998

# DF005M THRU DF10M

## MINIATURE GLASS PASSIVATED SINGLE-PHASE-BRIDGE RECTIFIER

**Reverse Voltage - 50 to 1000 Volts      Forward Current - 1.0 Ampere**

### Case Style DFM

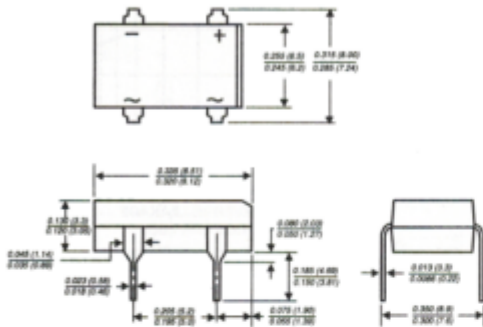

Dimensions in inches and (millimeters)

### FEATURES

- ◆ This series is UL listed under the Recognized Component Index, file number E54214
- ◆ Plastic package used has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ Surge overload rating of 50 Amperes peak
- ◆ Ideal for printed circuit boards
- ◆ High temperature soldering guaranteed:  
260°C/10 seconds at 5 lbs. (2.3kg) tension



### MECHANICAL DATA

**Case:** Molded plastic body over passivated junctions

**Terminals:** Plated lead solderable per MIL-STD-750, Method 2026

**Polarity:** Polarity symbols marked on body

**Mounting Position:** Any

**Weight:** 0.04 ounce, 1.0 gram

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	DF 005M	DF 01M	DF 02M	DF 04M	DF 06M	DF 08M	DF 10M	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum average forward output rectified current at T <sub>A</sub> =40°C	I <sub(av)< sub=""></sub(av)<>	1.0							Amp
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	50.0							Amps
Rating for fusing (t < 8.3ms)	I <sub>t</sub>	10.0							A <sup>2</sup> sec
Maximum instantaneous forward voltage drop per leg at 1.0A	V <sub>F</sub>	1.1							Volts
Maximum reverse current at rated DC blocking voltage per leg	I <sub>R</sub>	5.0 500.0							μA
Typical junction capacitance per leg (NOTE 1)	C <sub>J</sub>	25.0							pF
Typical thermal resistance per leg (NOTE 2)	R <sub>θJA</sub> R <sub>θJL</sub>	40.0 15.0							°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150							°C

**NOTES:**

(1) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(2) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.5 x 0.5" (13 x 13mm) copper pads

**RATINGS AND CHARACTERISTICS CURVES DF005M THRU DF10M**

FIG. 1 - DERATING CURVE OUTPUT RECTIFIED CURRENT

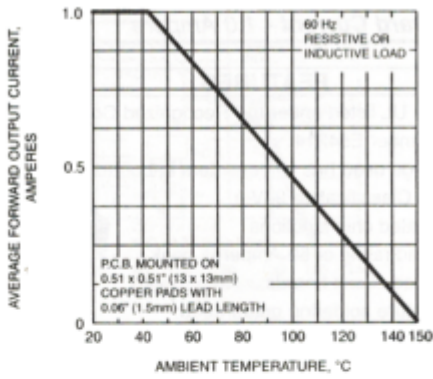


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG

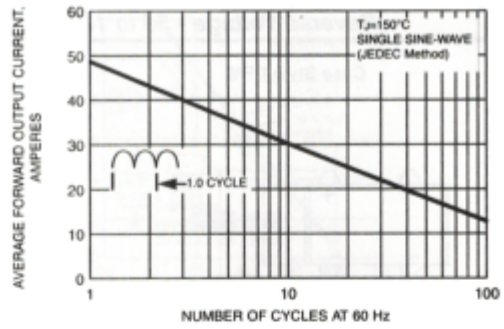


FIG. 3 - TYPICAL FORWARD CHARACTERISTICS PER LEG

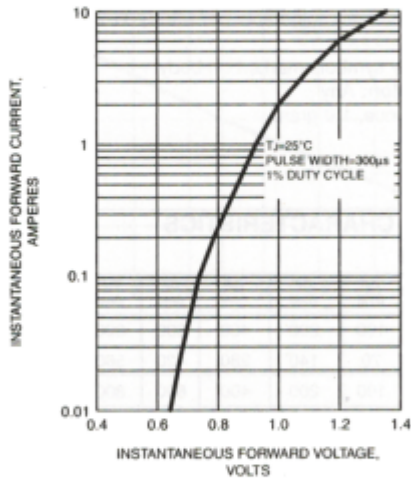


FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG

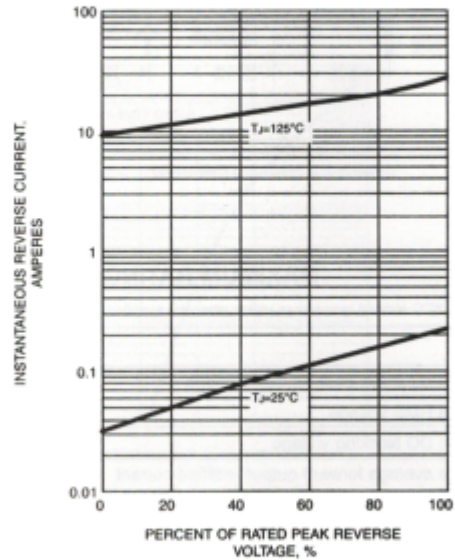


FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG

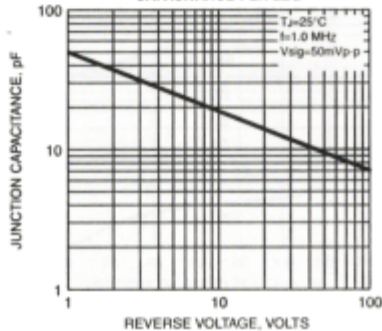


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

