

# Silicon Diode

## **BYV96E**

1kV/1.5A

# DATASHEET

OEM – Philips

Source: Philips Databook 1999

## Fast soft-recovery controlled avalanche rectifiers


## BYV96 series

### FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Available in ammo-pack.

### DESCRIPTION

Rugged glass package, using a high temperature alloyed construction. This package is hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

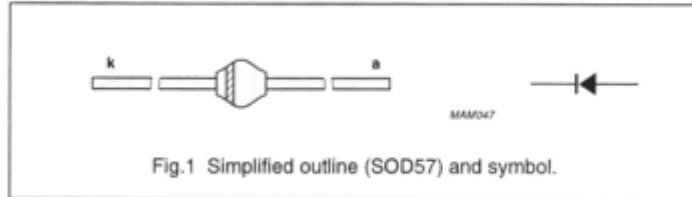

### LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
$V_{RRM}$	repetitive peak reverse voltage BYV96D BYV96E		–	800	V
			–	1000	V
$V_R$	continuous reverse voltage BYV96D BYV96E		–	800	V
			–	1000	V
$I_{F(AV)}$	average forward current	$T_{ip} = 55\text{ °C}$ ; lead length = 10 mm see Fig 2; averaged over any 20 ms period; see also Fig 6	–	1.5	A
		$T_{amb} = 55\text{ °C}$ ; PCB mounting (see Fig.11); see Fig 3; averaged over any 20 ms period; see also Fig 6	–	0.8	A
$I_{FRM}$	repetitive peak forward current	$T_{ip} = 55\text{ °C}$ ; see Fig 4	–	17	A
		$T_{amb} = 55\text{ °C}$ ; see Fig 5	–	9	A
$I_{FSM}$	non-repetitive peak forward current	$t = 10\text{ ms}$ half sine wave; $T_j = T_{j\text{max}}$ prior to surge; $V_R = V_{RRM\text{max}}$	–	35	A
$E_{RSM}$	non-repetitive peak reverse avalanche energy	$L = 120\text{ mH}$ ; $T_j = T_{j\text{max}}$ prior to surge; inductive load switched off	–	10	mJ
$T_{stg}$	storage temperature		–65	+175	°C
$T_j$	junction temperature	see Fig 7	–65	+175	°C

Fast soft-recovery  
controlled avalanche rectifiers

BYV96 series

**ELECTRICAL CHARACTERISTICS** $T_J = 25\text{ °C}$  unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$V_F$	forward voltage	$I_F = 3\text{ A}$ ; $T_J = T_{J\text{max}}$ ; see Fig 8	–	–	1.35	V
		$I_F = 3\text{ A}$ ; see Fig 8	–	–	1.60	V
$V_{(BR)R}$	reverse avalanche breakdown voltage	$I_R = 0.1\text{ mA}$				
			BYV96D	900	–	–
	BYV96E		1100	–	–	V
$I_R$	reverse current	$V_R = V_{RRM\text{max}}$ ; see Fig 9	–	–	1	$\mu\text{A}$
		$V_R = V_{RRM\text{max}}$ ; $T_J = 165\text{ °C}$ ; see Fig 9	–	–	150	$\mu\text{A}$
$t_{rr}$	reverse recovery time	when switched from $I_F = 0.5\text{ A}$ to $I_R = 1\text{ A}$ ; measured at $I_R = 0.25\text{ A}$ ; see Fig 12	–	–	300	ns
$C_d$	diode capacitance	$f = 1\text{ MHz}$ ; $V_R = 0\text{ V}$ ; see Fig 10	–	40	–	pF
$\left \frac{dI_R}{dt}\right $	maximum slope of reverse recovery current	when switched from $I_F = 1\text{ A}$ to $V_R \geq 30\text{ V}$ and $dI_F/dt = -1\text{ A}/\mu\text{s}$ ; see Fig.13	–	–	6	$\text{A}/\mu\text{s}$

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j\text{-tp}}$	thermal resistance from junction to tie-point	lead length = 10 mm	46	K/W
$R_{th\ j\text{-a}}$	thermal resistance from junction to ambient	note 1	100	K/W




**Note**

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer  $\geq 40\ \mu\text{m}$ , see Fig.11. For more information please refer to the 'General Part of Handbook SC01'

Fast soft-recovery  
controlled avalanche rectifiers




BYV96 series

GRAPHICAL DATA

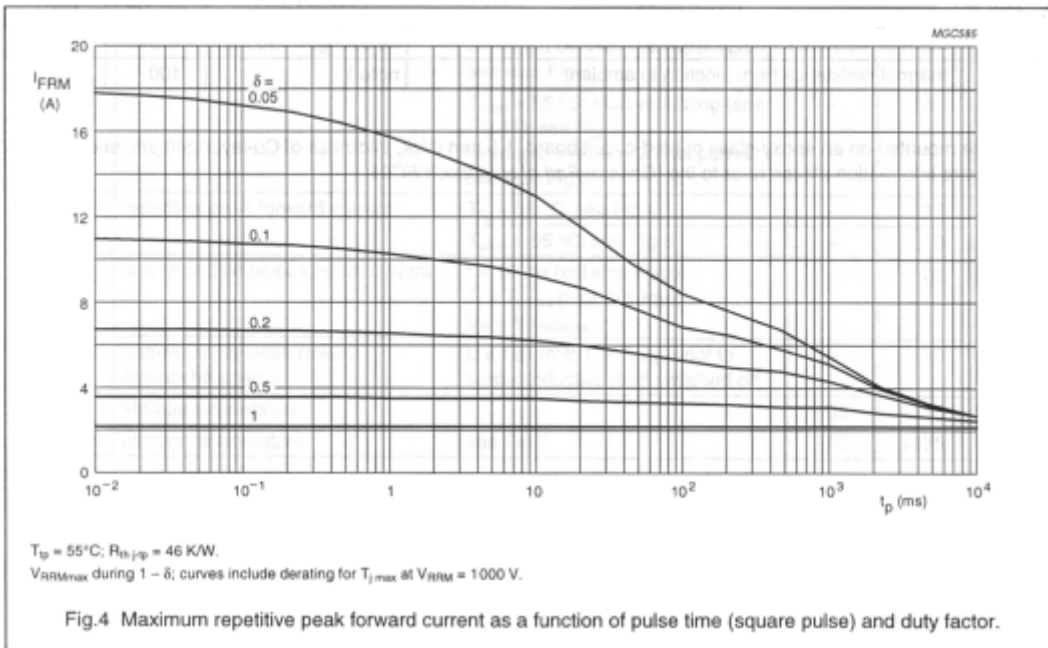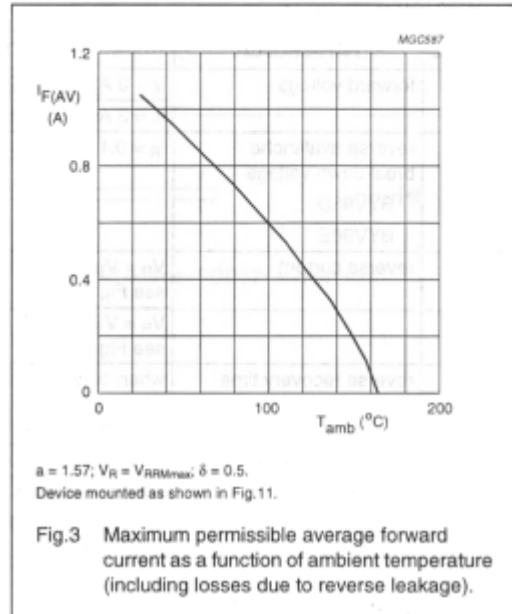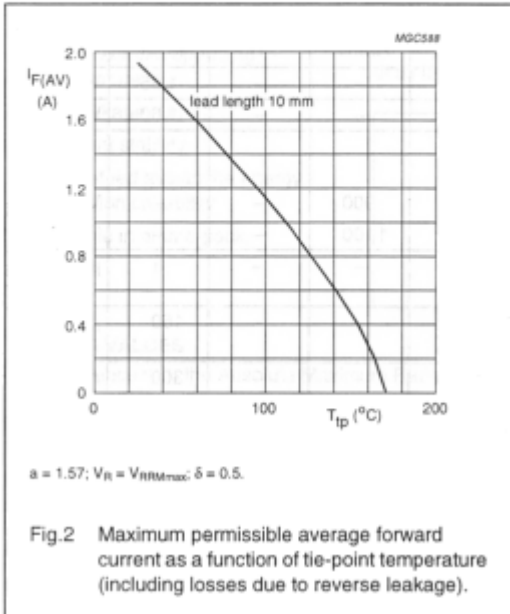





Fast soft-recovery  
controlled avalanche rectifiers

BYV96 series

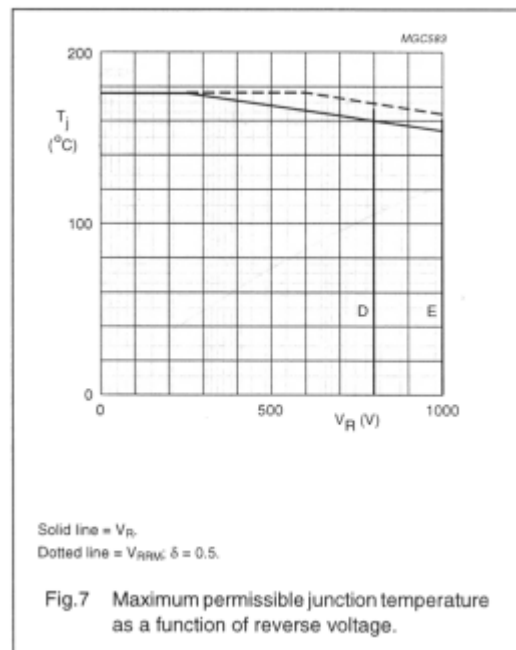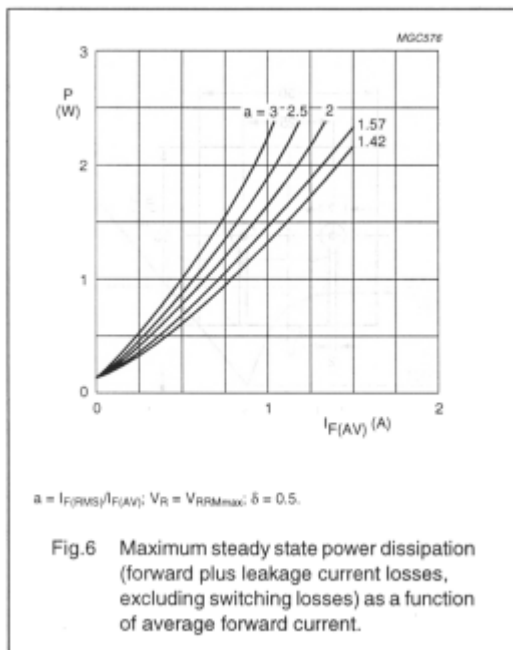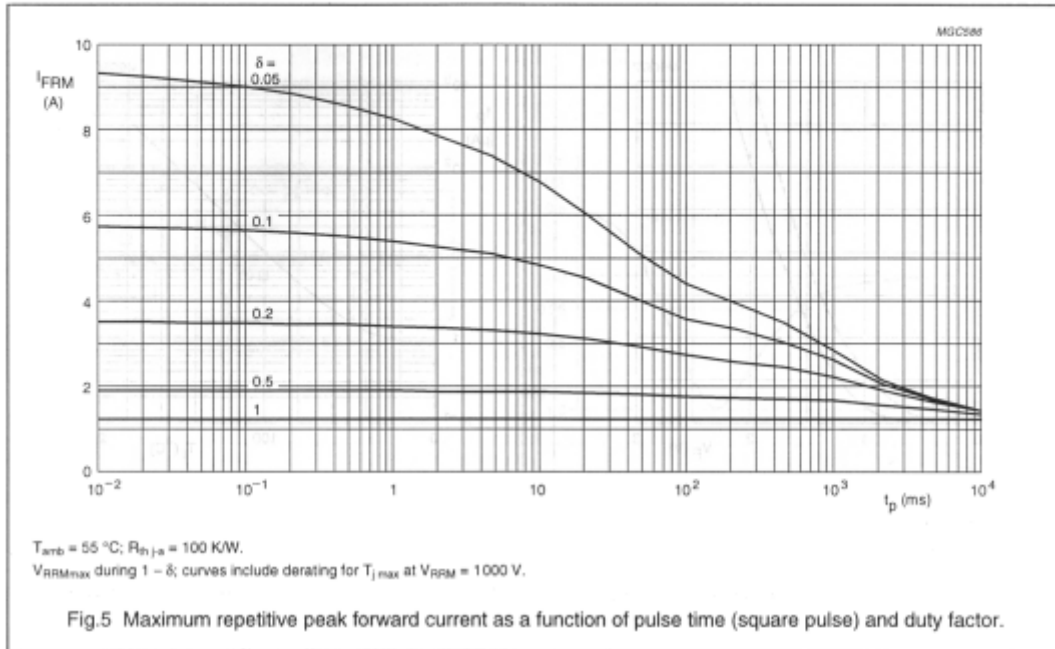

Fast soft-recovery  
controlled avalanche rectifiers

BYV96 series

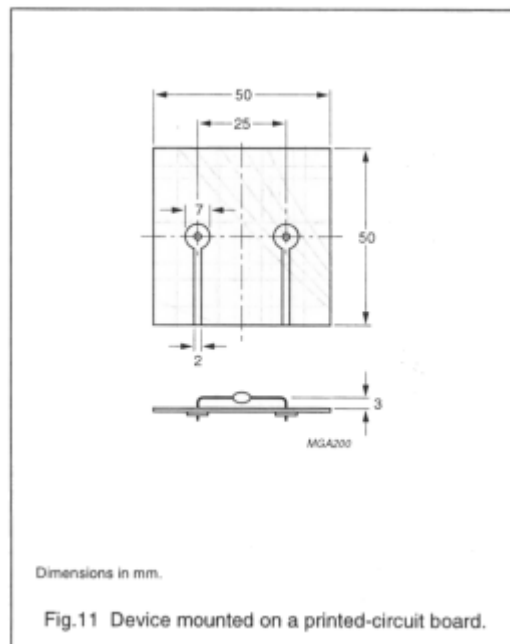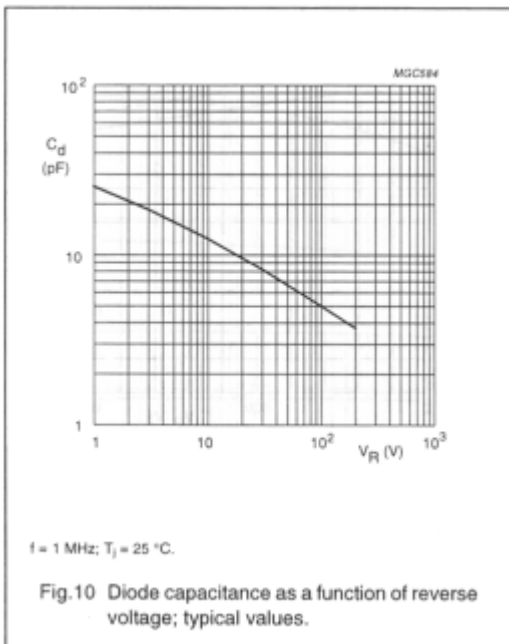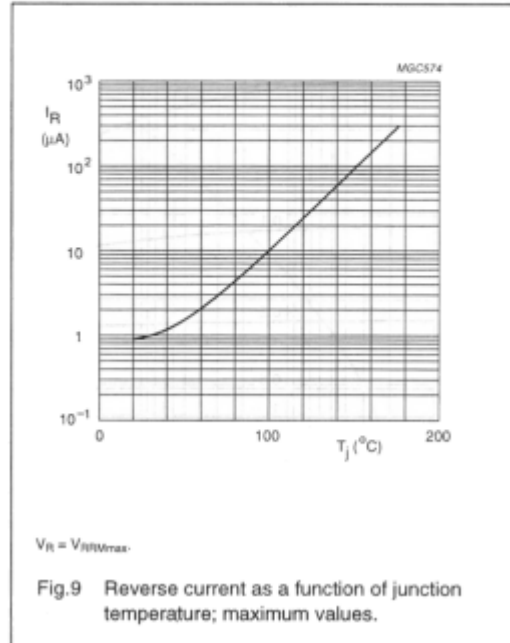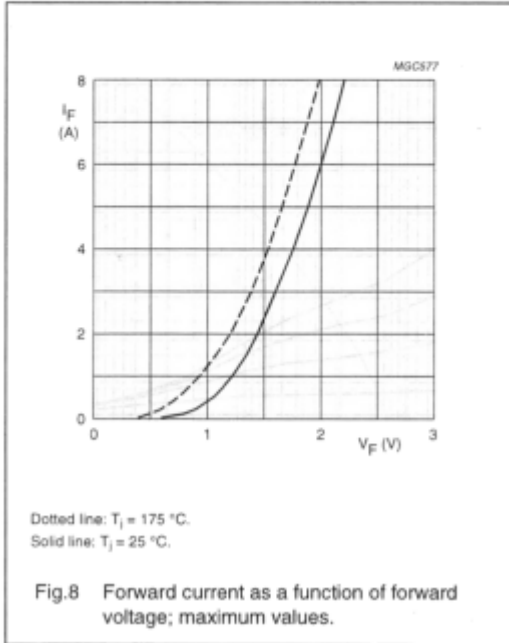

Fast soft-recovery  
controlled avalanche rectifiers

BYV96 series

