

Silicon Schottky Diode

BYV116-20

20V/10A

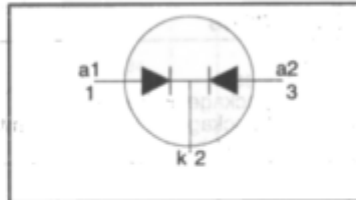
DATASHEET

OEM – Philips

Source: Philips Databook 1999

**Rectifier diodes
Schottky barrier**
BYV116, BYV116B series
FEATURES

- Low forward volt drop
- Fast switching
- Reverse surge capability
- High thermal cycling performance
- Low thermal resistance

SYMBOL

QUICK REFERENCE DATA

$$V_R = 20 \text{ V} / 25 \text{ V}$$

$$I_{O(AV)} = 10 \text{ A}$$

$$V_F \leq 0.54 \text{ V}$$


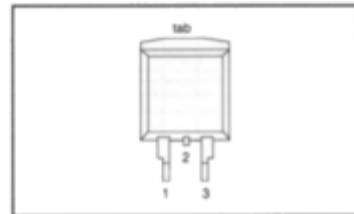
GENERAL DESCRIPTION

Dual schottky rectifier diodes intended for use as output rectifiers in low voltage, high frequency switched mode power supplies.

The BYV116 series is supplied in the SOT78 (TO220AB) conventional leaded package.
The BYV116B series is supplied in the SOT404 surface mounting package.

PINNING

PIN	DESCRIPTION
1	anode 1 (a)
2	cathode (k) ¹
3	anode 2 (a)
tab	cathode (k)

SOT78 (TO220AB)

SOT404

LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134)

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.		UNIT
				BYV118- BYV116B-		
V_{RRM}	Peak repetitive reverse voltage		-	20	25	V
V_{RWM}	Working peak reverse voltage		-	20	25	V
V_R	Continuous reverse voltage	$T_{mb} \leq 124 \text{ }^\circ\text{C}$	-	20	25	V
$I_{O(AV)}$	Average rectified forward current (both diodes conducting)	square wave; $\delta = 0.5$; $T_{mb} \leq 123 \text{ }^\circ\text{C}$	-	10		A
I_{FRM}	Repetitive peak forward current per diode	square wave; $\delta = 0.5$; $T_{mb} \leq 123 \text{ }^\circ\text{C}$	-	10		A
I_{FSM}	Non-repetitive peak forward current per diode	$t = 10 \text{ ms}$	-	50		A
		$t = 8.3 \text{ ms}$	-	55		A
I_{FRM}	Peak repetitive reverse surge current per diode	sinusoidal; $T_j = 125 \text{ }^\circ\text{C}$ prior to surge; with reapplied $V_{RRM(max)}$ pulse width and repetition rate limited by T_{jmax}	-	1		A
T_j	Operating junction temperature		-	150		$^\circ\text{C}$
T_{stg}	Storage temperature		-65	175		$^\circ\text{C}$

1. It is not possible to make connection to pin 2 of the SOT404 package.

Rectifier diodes
Schottky barrier

BYV116, BYV116B series

THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
$R_{th,j-mb}$	Thermal resistance junction to mounting base	per diode	-	-	4	K/W
$R_{th,j-a}$	Thermal resistance junction to ambient	both diodes	-	-	3.5	K/W
		SOT78 package, in free air	-	60	-	K/W
		SOT404 package, pcb mounted, minimum footprint, FR4 board	-	50	-	K/W

ELECTRICAL CHARACTERISTICS

All characteristics are per diode at $T_j = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_F	Forward voltage	$I_F = 5\text{ A}; T_j = 125^\circ\text{C}$	-	0.47	0.54	V
		$I_F = 10\text{ A}; T_j = 125^\circ\text{C}$	-	0.66	0.77	V
I_R	Reverse current	$I_F = 5\text{ A}$	-	0.58	0.64	V
		$V_R = V_{RWM}$	-	0.05	3	mA
		$V_R = V_{RWM}; T_j = 100^\circ\text{C}$	-	5	10	mA
C_d	Junction capacitance	$V_R = 5\text{ V}; f = 1\text{ MHz}; T_j = 25^\circ\text{C to } 125^\circ\text{C}$	-	160	-	pF

Rectifier diodes
Schottky barrier

BYV116, BYV116B series

