

Silicon Diode

BYV95A

200V/1.5A

DATASHEET

OEM – Philips

Source: Philips Databook 1999

Fast soft-recovery controlled avalanche rectifiers

BYV95 series

FEATURES

- Glass passivated
- High maximum operating temperature
- Low leakage current
- Excellent stability
- Guaranteed avalanche energy absorption capability
- Available in ammo-pack.

DESCRIPTION

Rugged glass SOD57 package, using a high temperature alloyed construction. This package is

hermetically sealed and fatigue free as coefficients of expansion of all used parts are matched.

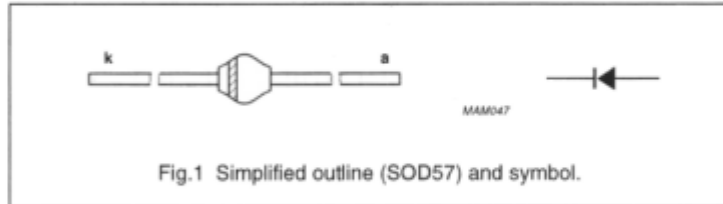


Fig.1 Simplified outline (SOD57) and symbol.

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{RRM}	repetitive peak reverse voltage				
	BYV95A		–	200	V
	BYV95B		–	400	V
	BYV95C		–	600	V
V_R	continuous reverse voltage				
	BYV95A		–	200	V
	BYV95B		–	400	V
	BYV95C		–	600	V
$I_{F(AV)}$	average forward current	$T_{tp} = 65\text{ °C}$; lead length = 10 mm see Fig. 2; averaged over any 20 ms period; see also Fig. 6	–	1.5	A
		$T_{amb} = 65\text{ °C}$; PCB mounting (see Fig.11); see Fig. 3; averaged over any 20 ms period; see also Fig. 6	–	0.8	A
I_{FRM}	repetitive peak forward current	$T_{tp} = 65\text{ °C}$; see Fig. 4	–	17	A
		$T_{amb} = 65\text{ °C}$; see Fig. 5	–	9	A
I_{FSM}	non-repetitive peak forward current	$t = 10\text{ ms}$ half sine wave; $T_j = T_{jmax}$ prior to surge; $V_R = V_{RRMmax}$	–	35	A
E_{RSM}	non-repetitive peak reverse avalanche energy	$L = 120\text{ mH}$; $T_j = T_{jmax}$ prior to surge; inductive load switched off	–	10	mJ
T_{stg}	storage temperature		–65	+175	°C
T_j	junction temperature	see Fig. 7	–65	+175	°C

Fast soft-recovery
controlled avalanche rectifiers

BYV95 series

ELECTRICAL CHARACTERISTICS $T_j = 25\text{ °C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT	
V_F	forward voltage	$I_F = 3\text{ A}$; $T_j = T_{j\text{max}}$; see Fig. 8	–	–	1.35	V	
		$I_F = 3\text{ A}$; see Fig. 8	–	–	1.60	V	
$V_{(BR)R}$	reverse avalanche breakdown voltage	$I_R = 0.1\text{ mA}$					
			BYV95A	300	–	–	V
			BYV95B	500	–	–	V
	BYV95C	700	–	–	V		
I_R	reverse current	$V_R = V_{RRM\text{max}}$; see Fig. 9	–	–	1	μA	
		$V_R = V_{RRM\text{max}}$; $T_j = 165\text{ °C}$; see Fig. 9	–	–	150	μA	
t_{rr}	reverse recovery time	when switched from $I_F = 0.5\text{ A}$ to $I_R = 1\text{ A}$; measured at $I_R = 0.25\text{ A}$; see Fig. 12	–	–	250	ns	
C_d	diode capacitance	$f = 1\text{ MHz}$; $V_R = 0\text{ V}$; see Fig. 10	–	45	–	pF	
$\left \frac{dI_R}{dt} \right _{\text{max}}$	maximum slope of reverse recovery current	when switched from $I_F = 1\text{ A}$ to $V_R \geq 30\text{ V}$ and $dI_F/dt = -1\text{ A}/\mu\text{s}$; see Fig.13	–	–	7	$\text{A}/\mu\text{s}$	

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th\ j-tp}$	thermal resistance from junction to tie-point	lead length = 10 mm	46	K/W
$R_{th\ j-a}$	thermal resistance from junction to ambient	note 1	100	K/W




Note

1. Device mounted on an epoxy-glass printed-circuit board, 1.5 mm thick; thickness of Cu-layer $\geq 40\ \mu\text{m}$, see Fig.11. For more information please refer to the 'General Part of Handbook SC01'.

Fast soft-recovery
controlled avalanche rectifiers




BYV95 series

GRAPHICAL DATA

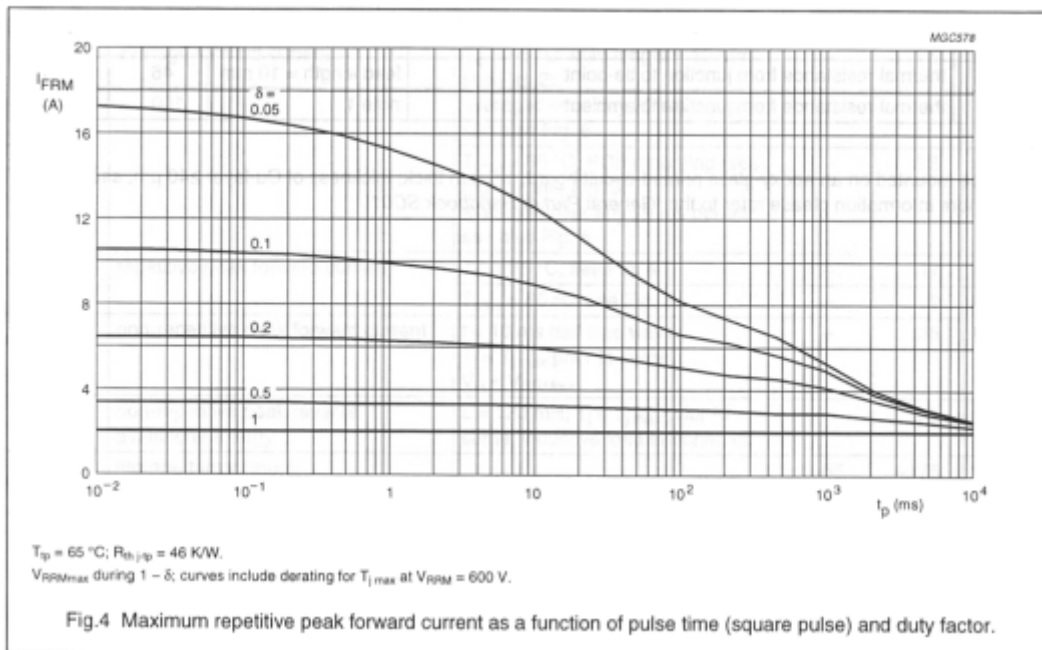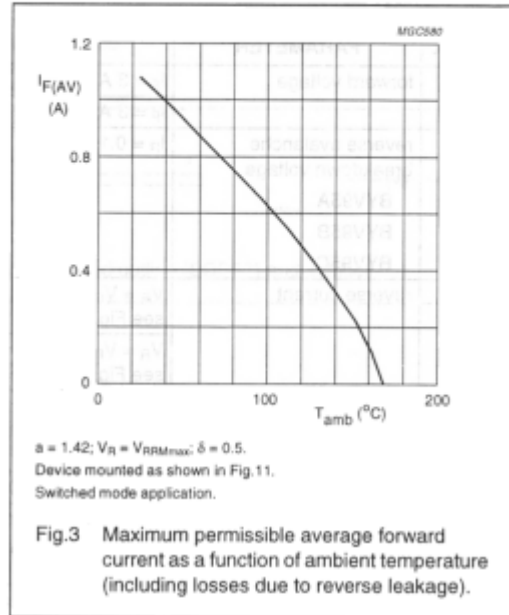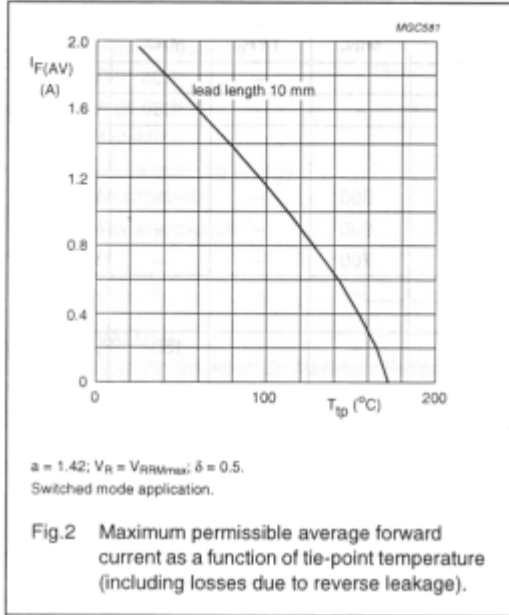





Fast soft-recovery
controlled avalanche rectifiers

BYV95 series

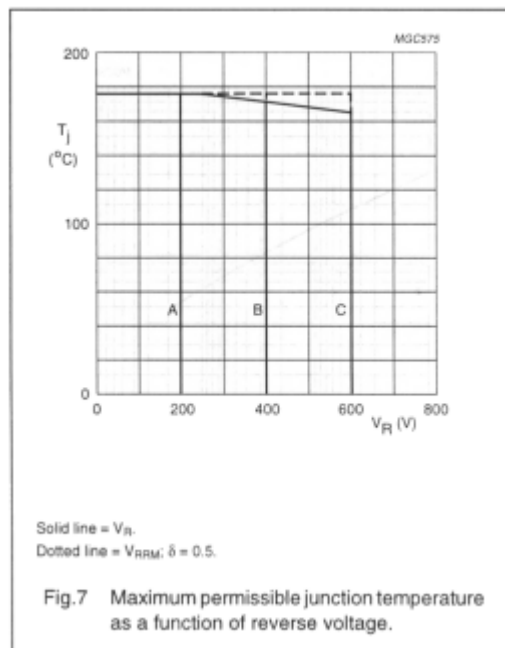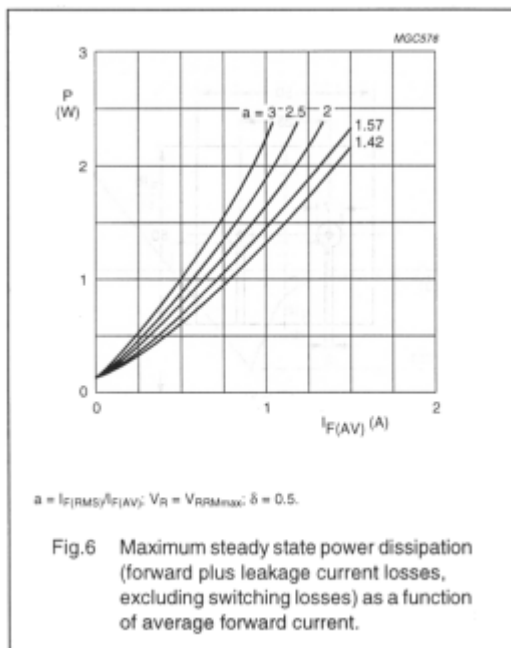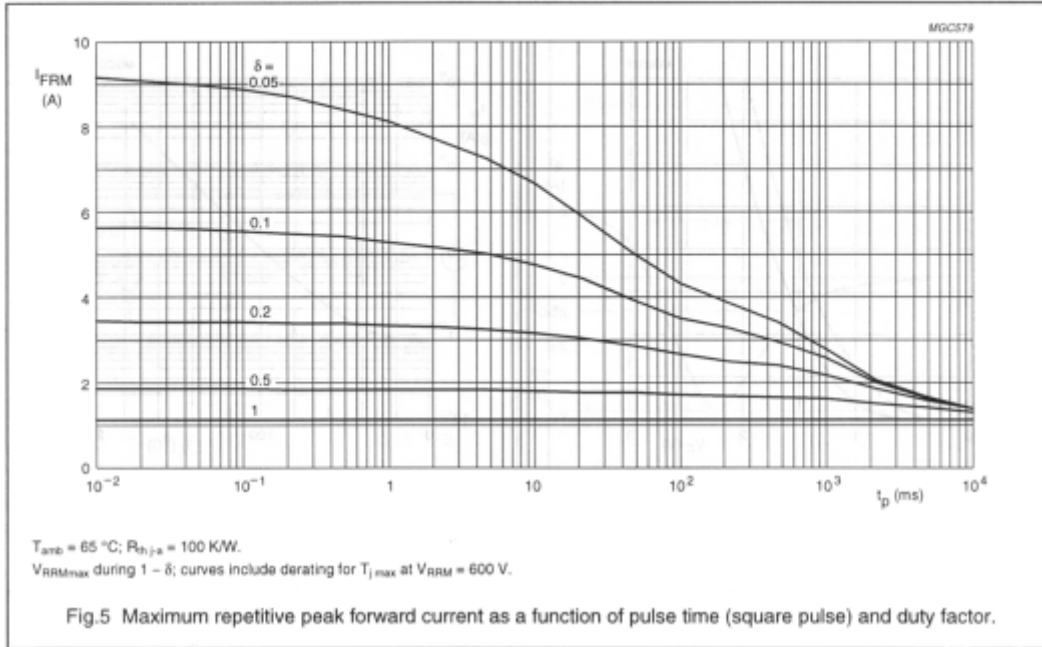

Fast soft-recovery
controlled avalanche rectifiers

BYV95 series

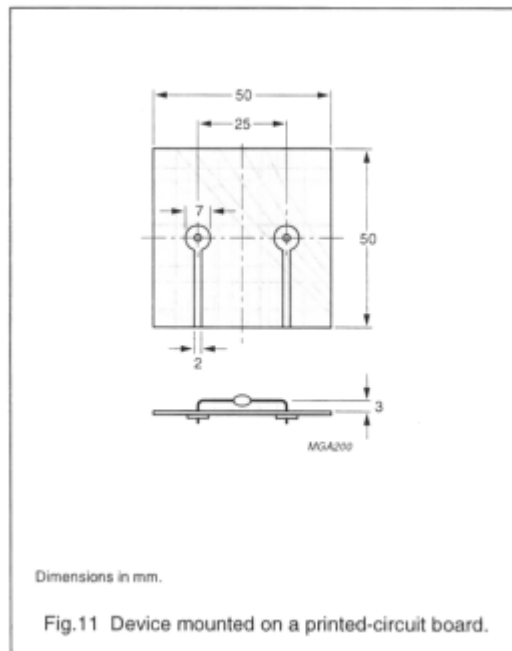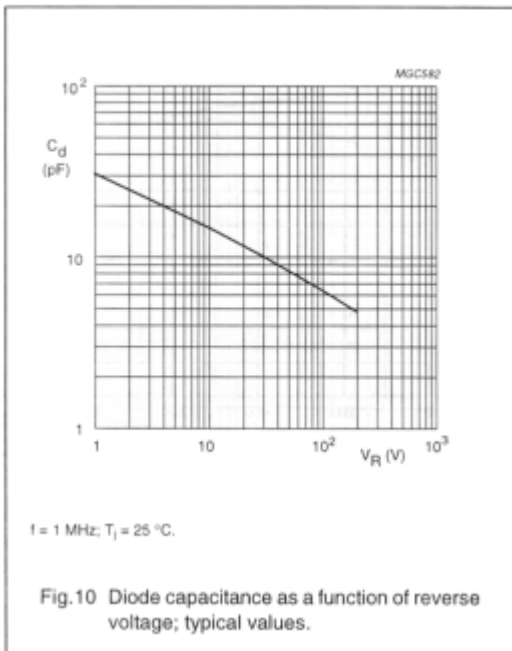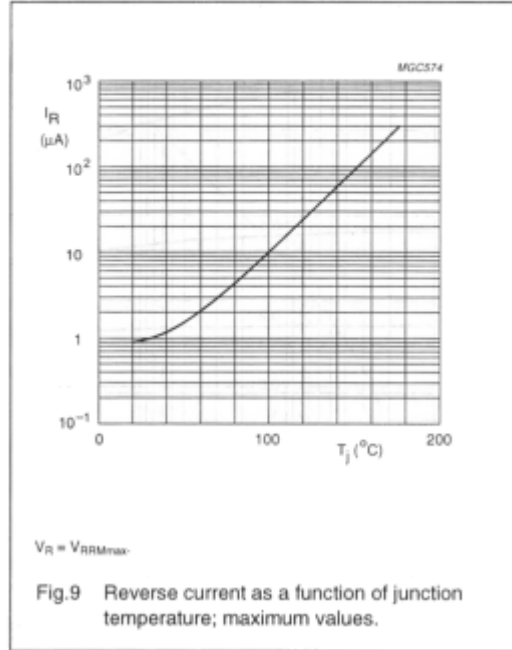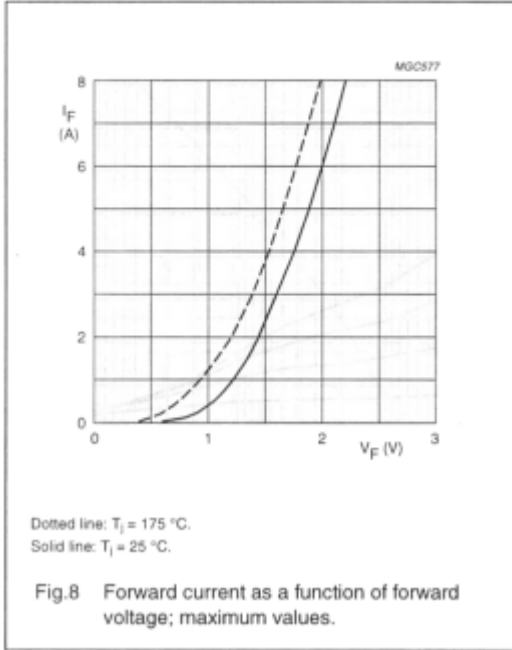

Fast soft-recovery
controlled avalanche rectifiers

BYV95 series

